


## Overhead Load-Carrying Conveyor



Overhead Load-Carrying Conveyor is used for continuous/periodic transportation of piece products around a closed loop path. Together with the load hanging and removing mechanisms, it creates an integrated conveyance system. This conveyor type can be effectively used for automation of transporting operations in various sectors of industry, agri-industrial complex, and consumer services (shops, dry cleaners, laundries, etc.).

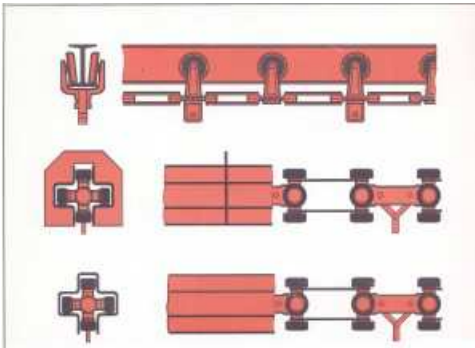

The equipment includes:

- track;
- track line fastening elements;
- double-hinged/dismountable traction chain with attached traction units with load carriers;
- rotators;
- tensioning devices;
- drive assembly.

### Major Specifications

Modification	ПНЦ-32	ПНЦ-200Д-50	ПНЦ-80	ПНЦ-100	ПНЦ-160
Carrying capacity, kg.....	80	160	250	500	800
Chain type.....	double-hinged	double-hinged	dismountable	dismountable	dismountable
Chain pitch, mm.....	200	200	80	100	160
Chain speed, m/s.....	0,01..0,66	0,012..0,667	0,005...0,4	0,002..0,393	0,008..0,393
Max. tilting angle of the track, grad.....	90	90	60	60	45
Overhead carrier hourly performance.....	6000	6000	3000	2358	2212
Supply voltage, V:					
power networks.....	380/220	380/220	380/220	380/220	380/220
control networks.....	220	220	220	220	220
Supply voltage frequency, Hz	50 (60)	50 (60)	50 (60)	50 (60)	50 (60)

The track lines, dismountable traction chains, carriers, and rotators can be operated within washing, drying and paint spray booths at a temperature up to +150°C.

### Contact us

Tel:	+38(032) 255-88-50	WEB:	<a href="http://www.conveyor.com.ua">www.conveyor.com.ua</a>
Tel / Fax::	+38(032) 255-88-09	E-mail:	<a href="mailto:convpr@ukr.net">convpr@ukr.net</a>
Tel. mob.	+38 067-671-23-72		

